


Brass Connection fittings - QT series


Raccordi di connessione in ottone - Serie QT

QT BA

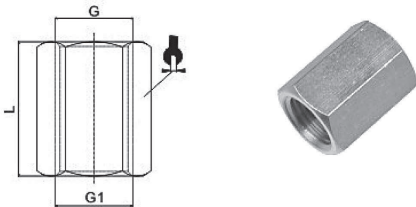


MODEL	G	G1	L	↻
QT BA 18 18	G1/8	G1/8	17	13
QT BA 14 14	G1/4	G1/4	23	16
QT BA 38 38	G3/8	G3/8	25,5	20
QT BA 12 12	G1/2	G1/2	30	24
QT BA 14 18	G1/4	G1/8	20	16
QT BA 38 14	G3/8	G1/4	23	20

QT BD

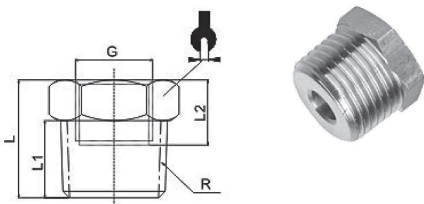


MODEL	G	R	L	L1	L2	↻
QT BD 14 14	G1/8	R1/4	14,5	9,5	8,5	14
QT BD 14 38	G1/8	R3/8	15,5	10,5	8,5	17
QT BD 18 12	G1/8	R1/2	19	13,5	8,5	21
QT BD 14 38	G1/4	R3/8	15,5	10,5	10	17
QT BD 14 12	G1/4	R1/2	19	13,5	11	21
QT BD 38 12	G3/8	R1/2	19	13,5	12	21

QT BZ

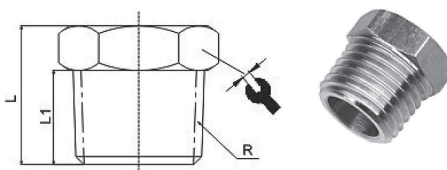


MODEL	R	L	L1	↻
QT BZ 18	R1/8	11	7,5	10
QT BZ 14	R1/4	14	9,5	14
QT BZ 38	R3/8	15,5	10,5	17
QT BZ 12	R1/2	19	13,5	21

QT BB

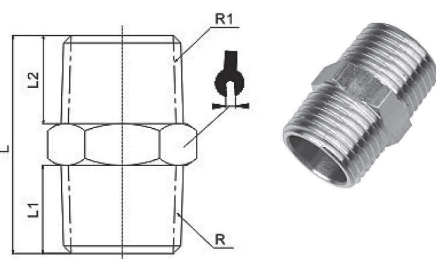


MODEL	R	R1	L	L1	L2	↻
QT BB 18 18	R1/8	R1/8	19,5	7,5	7,5	10
QT BB 14 14	R1/4	R1/4	24	9,5	9,5	14
QT BB 38 38	R3/8	R3/8	26,5	10,5	10,5	17
QT BB 12 12	R1/2	R1/2	33	13,5	13,5	21
QT BB 18 14	R1/8	R1/4	22	7,5	9,5	14
QT BB 18 38	R1/8	R3/8	23,5	7,5	10,5	17
QT BB 14 38	R1/4	R3/8	25,5	9,5	10,5	17
QT BB 14 12	R1/4	R1/2	28	9,5	13,5	21
QT BB 38 12	R3/8	R1/2	29	10,5	13,5	21

QT BP

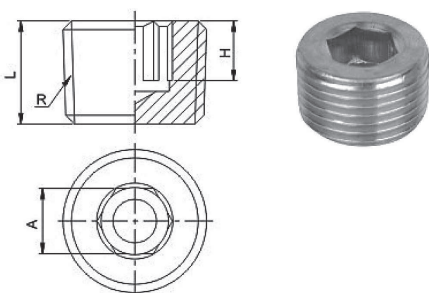


MODEL	R	L	H	A
QT BP 18	R1/8	8	4,5	5
QT BP 14	R1/4	10	5,5	6
QT BP 38	R3/8	10,5	6	8
QT BP 12	R1/2	13,5	8	10

QT PG




MODEL	G	L1	L2	L3	A	ØB
QT PG 18	G1/8	5,5	7,5	4	4	13
QT PG 14	G1/4	6,5	8,5	4,5	6	16
QT PG 38	G3/8	7,5	10	5,5	8	20
QT PG 12	G1/2	9	11,5	6,5	10	24

QT EF




MODEL	G	L1	L2	L3	↻
QT EF 18	G1/8	8,5	18	36	12
QT EF 14	G1/4	11	23	46	14
QT EF 38	G3/8	12	25,5	51	16
QT EF 12	G1/2	14	30,5	61	17

QT ET




MODEL	R	L1	L2	L3	↻
QT ET 18	R1/8	7,5	15	30	9
QT ET 14	R1/4	9,5	19	38	10
QT ET 38	R3/8	10,5	22,5	45	14
QT ET 12	R1/2	13,5	28,5	57	17

QT FM




MODEL	R	G	L1	L2	L3	L4	↻
QT FM 18	R1/8	G1/8	7,5	8,5	16	19	10
QT FM 14	R1/4	G1/4	9,5	11	21	23	11
QT FM 38	R3/8	G3/8	10,5	12	23	27,5	14
QT FM 12	R1/2	G1/2	13,5	14	28	31	17

QT LF



MODEL	G	L	L1	↻
QT LF 18	G1/8	8,5	18	9
QT LF 14	G1/4	11	23	11
QT LF 38	G3/8	12	28,5	13
QT LF 12	G1/2	14	30,5	17

QT CL



MODEL	R1	R2	L1	L2	L3	L4	↻
QT CL 18 18	R1/8	R1/8	7,5	16	7,5	16	7
QT CL 18 14	R1/8	R1/4	7,5	17	9,5	19	10
QT CL 18 38	R1/8	R3/8	7,5	19	10,5	22,5	12
QT CL 14 14	R1/4	R1/4	9,5	20	9,5	20	10
QT CL 14 38	R1/4	R3/8	9,5	21	10,5	22,5	12
QT CL 14 12	R1/4	R1/2	9,5	22,5	13,5	27,5	12
QT CL 38 38	R3/8	R3/8	10,5	23	10,5	25	14
QT CL 38 12	R3/8	R1/2	10,5	23	13,5	28	14
QT CL 12 12	R1/2	R1/2	13,5	28,5	13,5	28,5	17